
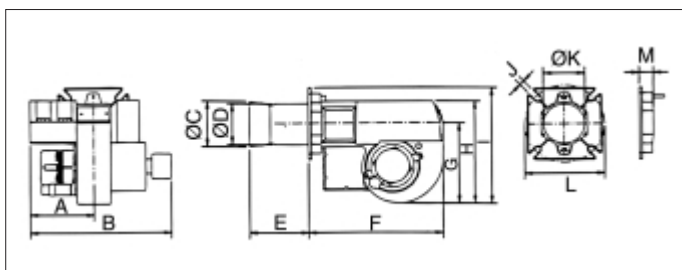


13 QUEMADORES A GASÓLEO
B-30/B-40/B-45 (de 61.000 a 464.500 Kcal/h)


Mod.	A	B	ØC	ØD	E	F	G	H	I	J	ØK	L	M
B-30	175	382	108	108	222	372	220	281	303	10,5	108	160-190	35
B-30-2	188	415	110	110	222	372	220	281	303	10,5	108	160-190	35
B-40-2	207	435	126	114	302	420	260	310	360	14	114	200-230	37
B-45-2	262	515	162	134	338	480	252	328	335	14	134	200-230	33

Características técnicas:

Modelo	B-30-L	B-30-2L	B-40-2L	B-45-2.2L
Código	CE 13 206	CE 13 207	CE 13 208	CE 13 209
Potencia Kw	71 - 205		107 - 350	101 - 540
Potencia Kcal/h	61.000 - 176.000		91.000-301.000	86.900-464.500
Consumo Kg/h	6,0 - 17,3		9,0 - 29,5	8,5 - 45,5
Motor V/Hz/W	230 / 50 / 180		230 / 50 / 250	230 / 50 / 450
Caja de control	BENTONE LANDIS			
Bomba	Suntec			
Euroconector	De serie			
Cierre aire	Manual		Servomotor	
Regulación aire	Todo-Nada		2 Etapas	
Nº Boquillas	1	1	2	2
Presión bomba Kg	12	12-22	14	
Normativa	EN267			
Peso bruto Kg	18	20	23	34
Volumen m³	0,08		0,11	0,22

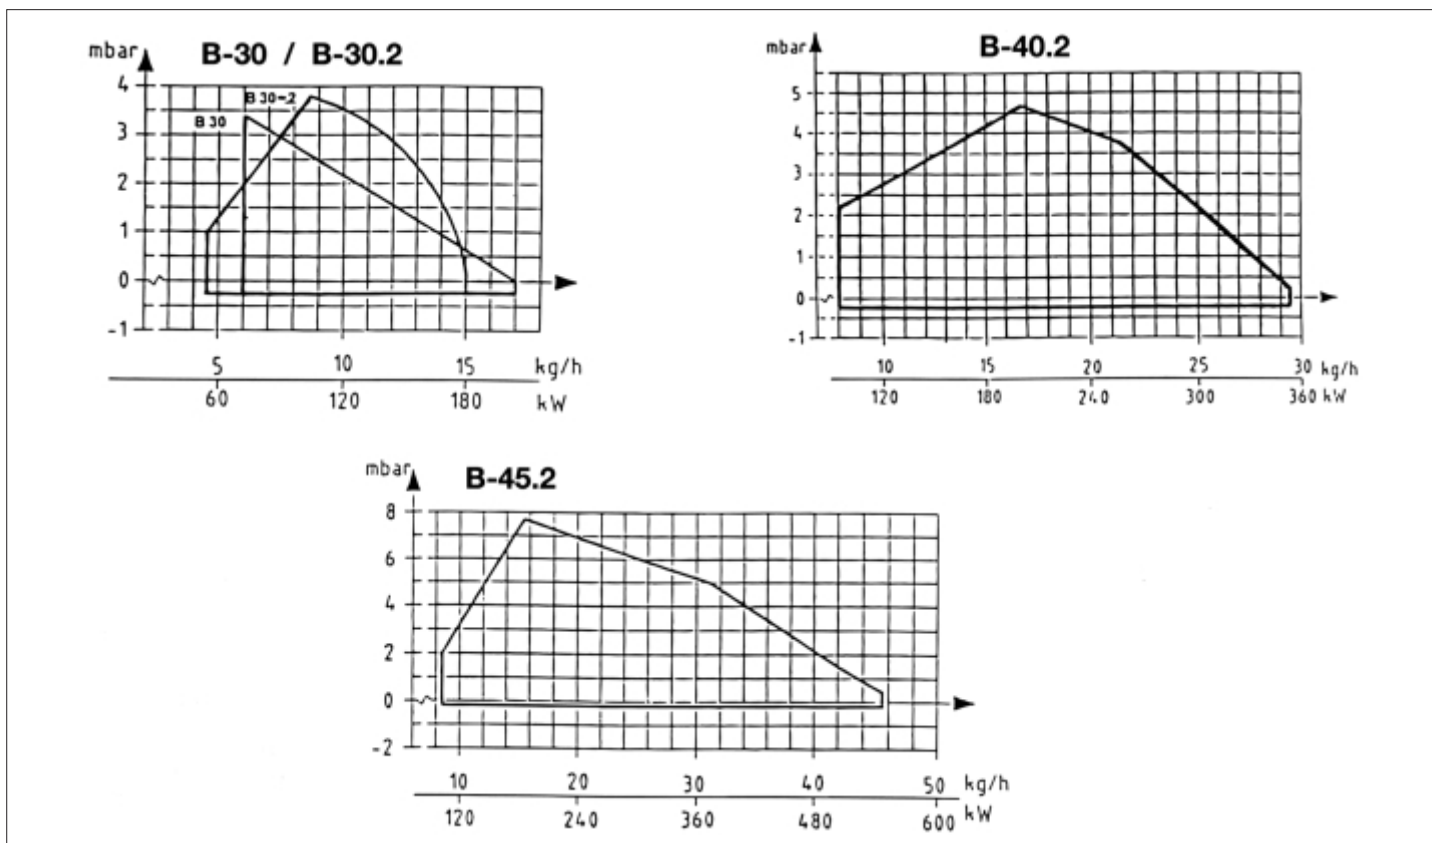